


Product Specifications

FlashLink PDF In-Transit Logger

Measurement Range	-40°F to 122°F (-40°C to 50°C)
Temperature Resolution	0.1°F/°C
Accuracy	±1.0°F from -4°F to 113°F, (±0.5°C from -20°C to 45°C); ±2.0°F above 113°F, (±1.0°C above 45°C); ±2.0°F below -4°F, (±1.0°C below -20°C);
Data Capacity	3,823 data points
Data Download Time	30 seconds typical for 3,823 points
Factory Programmable Alarm Levels	High/low limits over entire temperature range
Battery	Coin Cell Lithium battery
Dimensions	1.93" x 3.62" x 0.67" (49mm x 92mm x 17mm)
Casing	ABS plastic
Weight	1.6 oz. (45.36 grams)
Shock Resistance	Withstands 3-foot (1 meter) drop to hard surface
Certification	CE Mark, Calibration traceable to NIST, ROHS Compliant, BSS 7061 Compliant
Display	LCD, Red LED Alarm
Storage conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
PDF Standards	Complies with ISO19005-1, PDF/A, 21 CFR Part 11
System Requirements	Windows PC with current operating system, Adobe Reader
Download Requirements	Direct USB connection

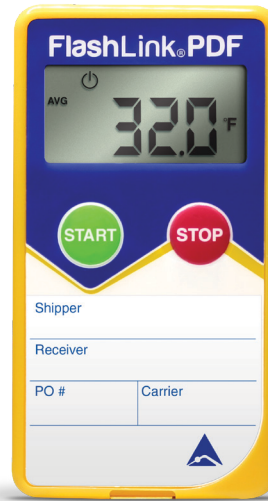

Models	5-Day	15-Day	45-Day	75-Day
Logging Interval	1 minute 54 seconds	5 minute 40 seconds	16 minute 58 seconds	28 minute 16 seconds
°F	40420	40430	40440	40450
°C	40421	40431	40441	40451

- Single-use temperature logger
- Large, easy to read LCD display
- No software required to download data
- Built-in USB connector, no special reading devices needed
- Automatically creates secure PDF report and CSV file
- Trip history statistics available on LCD
- Patented Shadow Log® feature guarantees data even if the shipper fails to start the logger
- High/low alarm indicators
- Service available to custom configure logging parameters, alarms, delayed start

Patent No. 6,088, 514

DeltaTrak manufactures products under an ISO 9001:2015 registered quality management system

SS 40420-X_18J1

